


◎ L形側溝 (JIS A 5371 : 推奨仕様 3-1、JIS A 5372 : 推奨仕様 5-4)

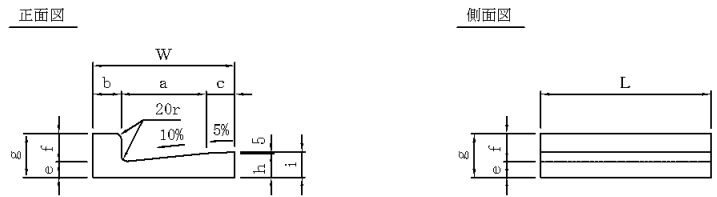


寸法表


呼び名		寸法 (mm)									参考重量 (kg)	
		W	a	b	c	e	f	g	h	i		L
コンクリートL形	250A	350	250	100	—	75	100	175	100	—	600	57
	250B	450	250	100	100	75	100	175	100	105	600	72
鉄筋コンクリートL形	250A	350	250	100	—	55	100	155	80	—	600	47
	250B	450	250	100	100	55	100	155	80	85	600	59
	300	500	300	100	100	55	100	155	85	90	600	65
	350	550	350	100	100	55	100	155	90	95	600	74

◎ L形側溝 (出入口用、切下げ)


出入口用 (H=20)  
250B(300)

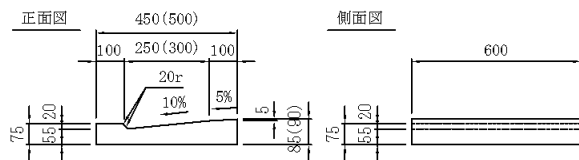


出入口用 (H=50)  
250B(300)

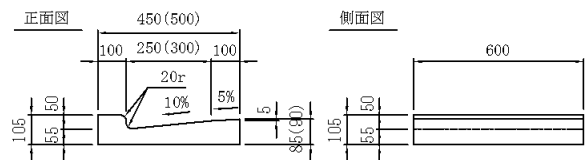


切下げ左 (H=20-100)  
250B(300)

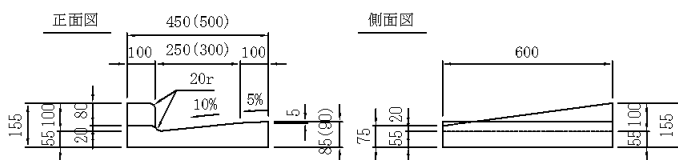

切下げ右 (H=20-100)  
250B(300)

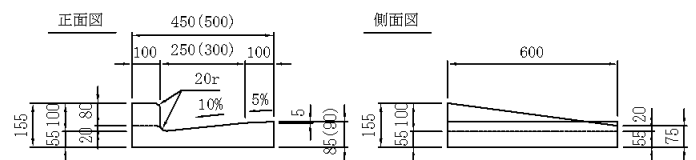

切下げ左 (H=50-100)  
250B(300)

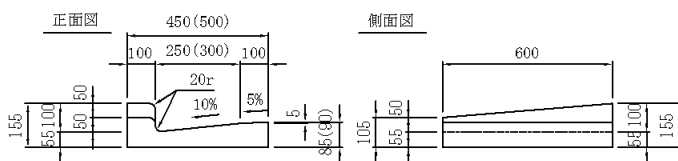

切下げ右 (H=50-100)  
250B(300)

